

Notes on the floor in the arena hall, use of adhesive materials and markings

The surface of the hall floor is made of mastic asphalt. Except in the areas marked on the plans (see below), heavy goods traffic (e.g. lorries) is possible.

The shiny black effect of the floor is caused by surface treatment. The surface is sensitive to abrasion (e.g. fast cornering of vehicles), damage caused by mechanical stresses (e.g. pushing heavy objects) or when removing adhesive materials.

The repairing of damaged areas is time-consuming and expensive, and often the treatment of extensive areas is required.

No substances containing oil or grease etc. (e.g. oil chalk) may be used for floor markings, and only residue-free removable adhesive tape etc. and no paints may be used.

Only residue-free removable material (e.g. special adhesive tape) may be used as adhesive material.

Examples of approved materials:


For marking and taping under ordinary adhesive tape such as Gaffa or carpet tape:

- from Würth: Präzisions-Kreppband strong [Präzisions-Kreppband online kaufen | WÜRTH \(wuerth.de\)](https://www.wuerth.de)
- from Tesa: Präzisionskrepp 4342 [tesakrepp® 4342 Präzisionskrepp - tesa](https://www.tesa.com)


For prints and guidance systems etc.:

- Rapid Air Folie from Oracal
- Self-adhesive fabric from PhotoTex

The adhesive materials mentioned must be removed with caution, e.g. damage to the hall floor can still occur if the adhesive tape or film is torn off quickly and incorrectly.

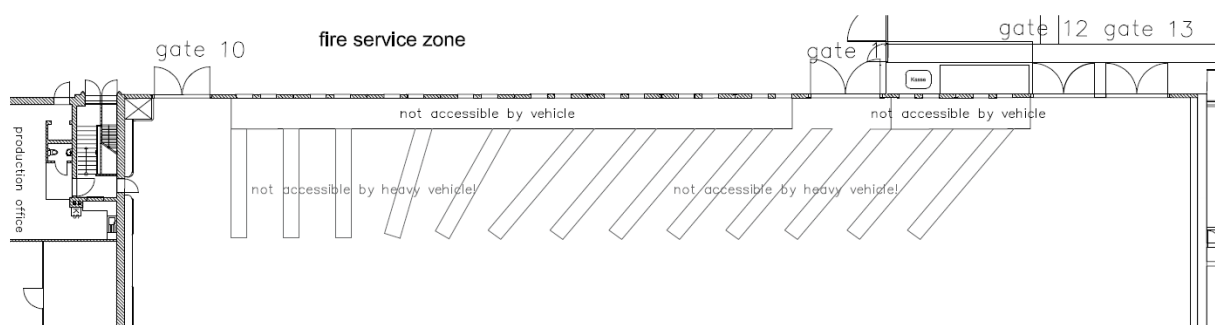

Non-trafficable area of the hall (west side)

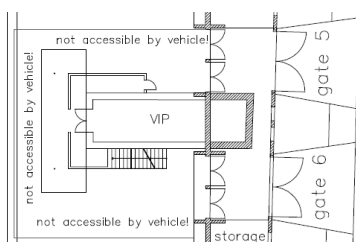

Non-trafficable area of the hall (east side)